



30210-1D

10 watt COB down light



colour	ww
colour temp	2800K
power factor	>0.90
voltage	AC 85-240V
efficacy l/w	80-85 lm/w
dimnable	Yes
cri	≥80
total lumen	800-850
life time	40.000 hrs
beam angle	120 deg
wattage	10 watt
replacement for	25 watt
diameter ø	103 mm
cut out	75-95mm
height	81 mm
led chip	COB
lens	Clear
certificates	CE/rohs
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.



Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com




raw *led*

Light output

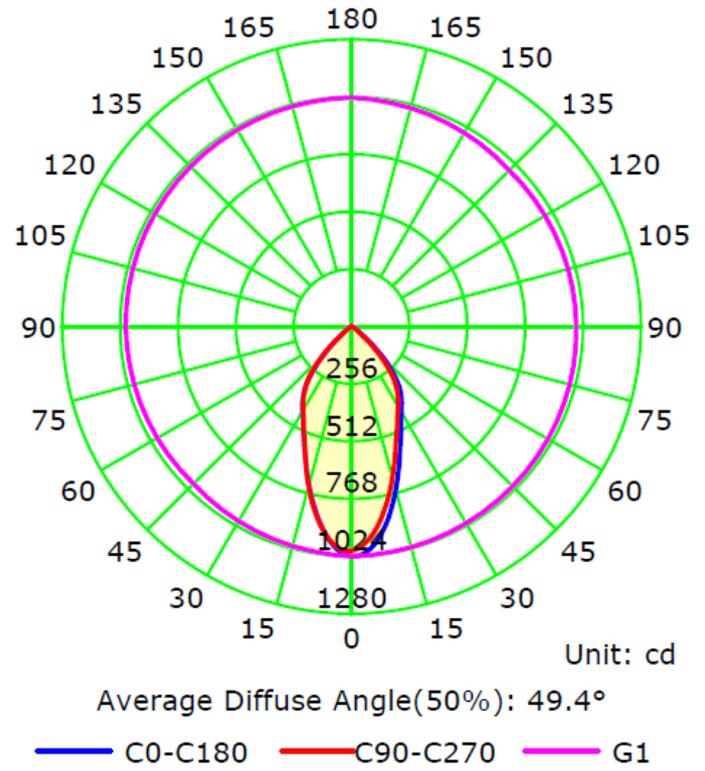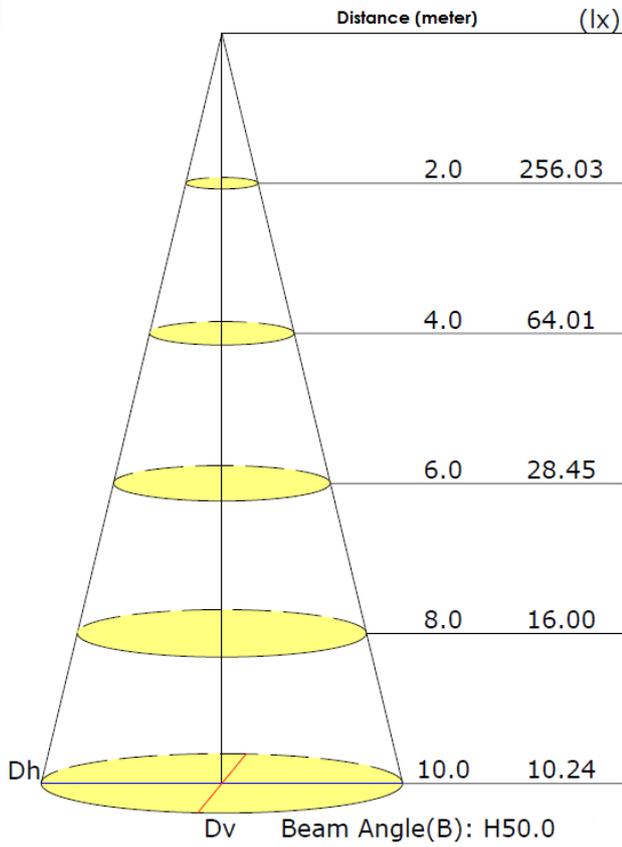

Product dimensions

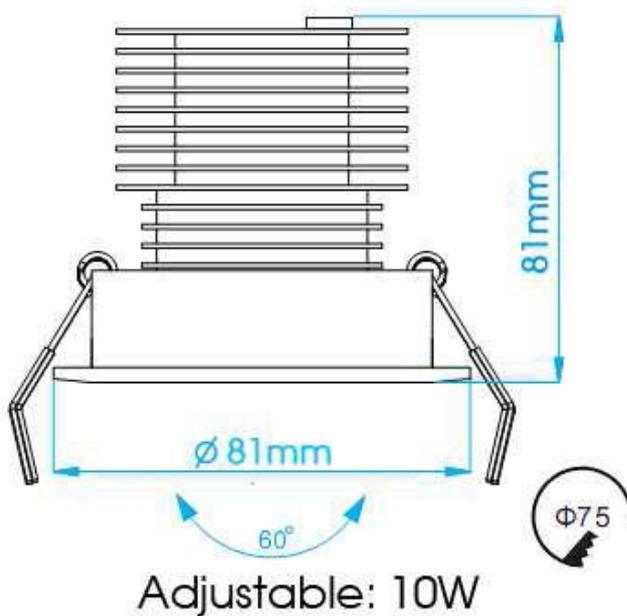



raw ^{led}

Packaging

Carton size: 47*44*39 cm

Items per carton: 48 pieces

Net weight: 344 grams

Gross weight: 16.5kg



30212-1D

12 watt COB down light



colour	ww
colour temp	2800K
power factor	>0.90
voltage	AC 85-240V
efficacy l/w	80-85 lm/w
dimnable	Yes
cri	≥80
total lumen	960-1020
life time	40.000 hrs
beam angle	60 deg
wattage	12 watt
replacement for	30 watt
diameter ø	110 mm
cut out	70 mm
height	85 mm
led chip	COB
lens	Clear
certificates	CE/rohs
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.



Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com





raw led

Light output

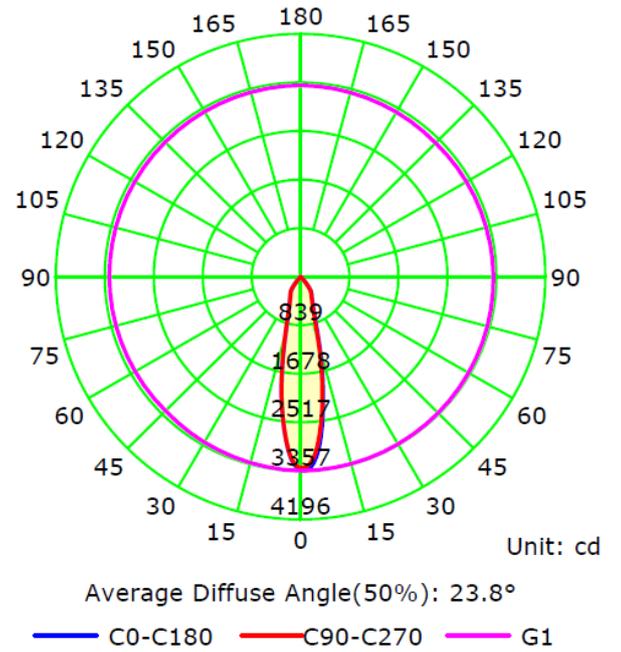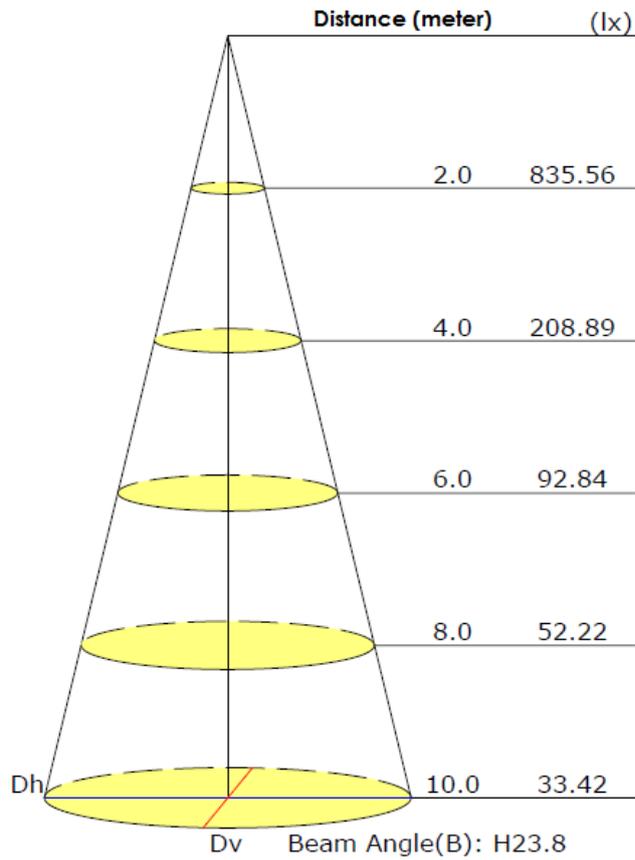

Product dimensions

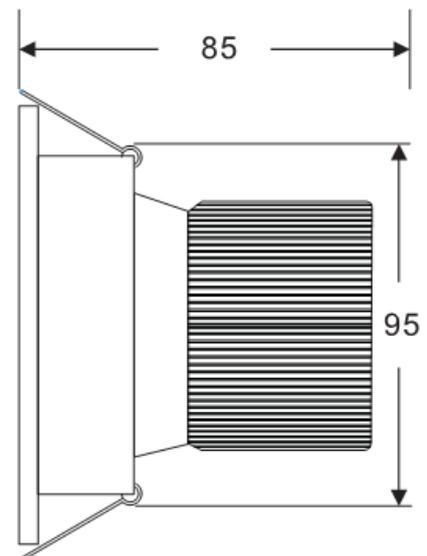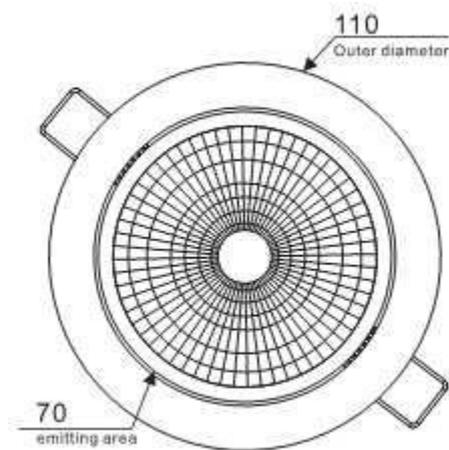



raw ^{led}

Packaging

Carton size: 46*42*36 cm

Items per carton: 27 pieces

Net weight: 574 grams

Gross weight: 15.5kg



30215-1D

15 watt COB down light



colour	ww
colour temp	2800K
power factor	>0.90
voltage	AC 85-240V
efficacy l/w	80-85 lm/w
dimnable	Yes
cri	≥80
total lumen	1200-1275
life time	40.000 hrs
beam angle	60 deg
wattage	15 watt
replacement for	40 watt
diameter ø	138 mm
cut out	120mm
height	90 mm
led chip	COB
lens	Clear
certificates	CE/rohs
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.



Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com



raw *led*



Light output

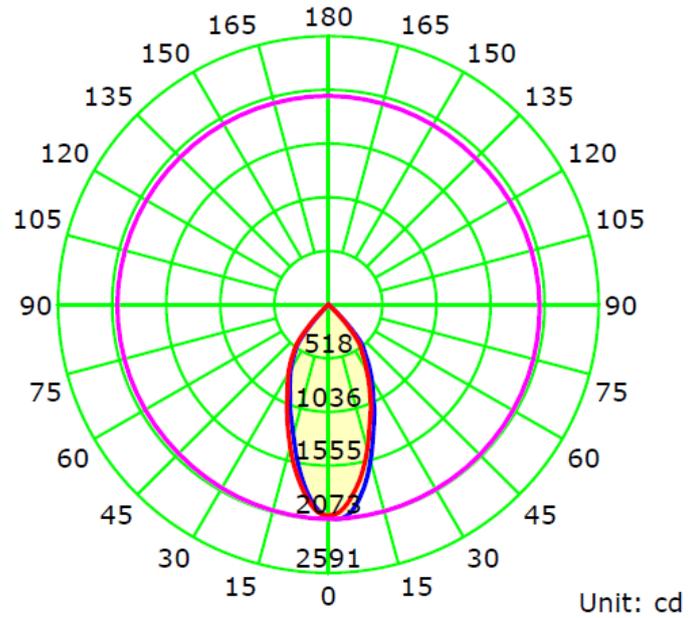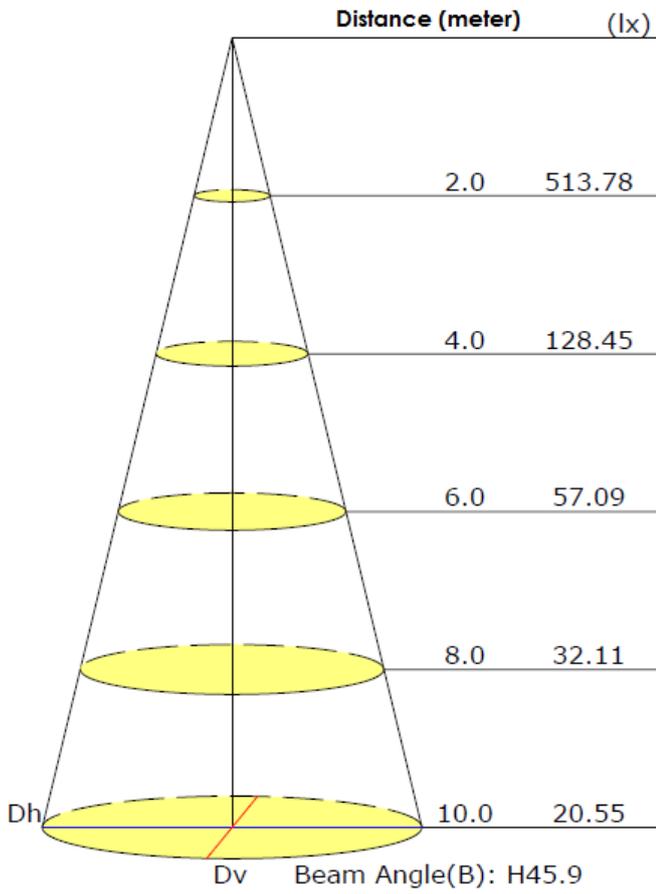

Average Diffuse Angle(50%): 46.2°

— C0-C180 — C90-C270 — G2

Product dimensions

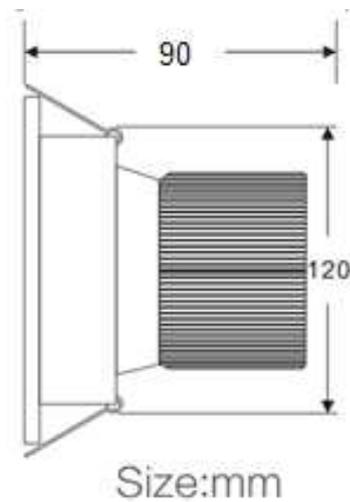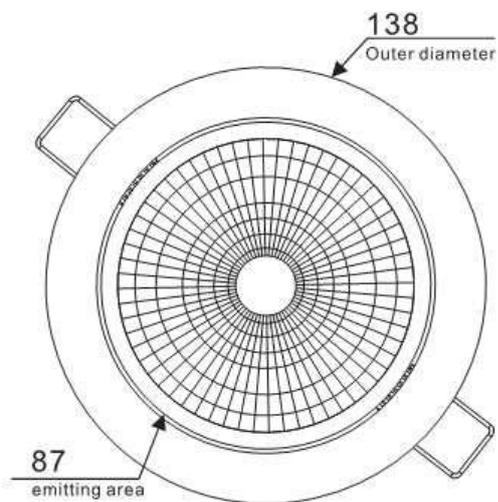



raw ^{led}

Packaging

Carton size: 48*46*34 cm

Items per carton: 18 pieces

Net weight: 1.03 kg

Gross weight: 18.5 kg