



718021-1D Led kaars E14



colour	2200K – 2500K – 2700K
base	e14
cri	>80
voltage	220-240V
efficacy l/w	>100 lm/w
dimmable	yes
total lumen	200/300/400lm
life time	35.000 hrs
beam angle	360 deg
wattage	2/3/4 watt
replacement for	candle 20/30/40 watt
diameter ø	35 mm
height	100 mm
bulb finish	Clear glass
certificates	TUV / ce/rohs
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.


Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com



raw *led*

Light source

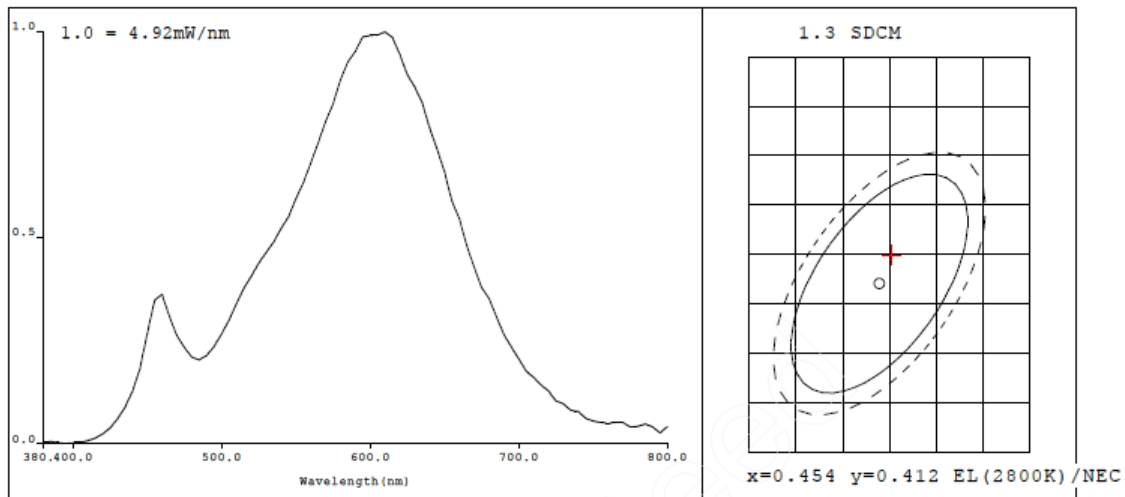

CIE Color Parameters:

Chromaticity Coordinate: $x=0.4553$ $y=0.4149$ / $u'=0.2577$ $v'=0.5283$ ($duv=2.00e-03$)

CCT: $T_c=2798K$ Prcp WaveL: $\lambda_d=583.1nm$ Purity=61.2%

Peak WaveL: $\lambda_p=610nm$ Half Width: $\Delta\lambda_p=126.9nm$ Ratio: R=23.9% G=73.7% B=2.4%

Average Wave: 596nm

Rendering Index: $R_a=81.4$ $R_a'=75.8$

R1 =79 R2 =91 R3 =96 R4 =77 R5 =79 R6 =88 R7 =83 R8 =58

R9 =8 R10=78 R11=75 R12=69 R13=82 R14=99 R15=72

Photo Parameters: (Standard lamp:A2856K)

Flux: $\Phi=236.76(lm)$ Luminous Efficacy: 112.20(lm/W) Luminous Power: $P=744.8(mW)$

Electrical Parameters:

U=230.6V I=0.02077A P=2.110W PF=0.440

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm $I_p = 11378(G=6,D=306)$
REF = 14190 TMP(PMT) = 31.6degrees centig:Test Mode: Fast Test

Packaging details

Outer carton size: 46x25x28cm

100 pieces per carton

Gross Weight: 4kg per carton



raw ^{led}

